



# FELTUM WOOLFELT SPECIFICATIONS

## TECHNICAL DATA

### MEASUREMENTS

THICKNESS	2 mm	3 mm	5 mm
WEIGHT	600 g/m <sup>2</sup> - 1080 g/r.m	900 g/m <sup>2</sup> - 1660 g/r.m	1500 g/m <sup>2</sup> - 2175 g/r.m
LENGHT	10-60 lin m - 11-65 lin yd	10-60 lin m - 11-65 lin yd	10-60 lin m - 30 lin yd
WIDTH	180 cm -70 3/4 in	180 cm -70 3/4 in	145 cm -57 in
DENSITY	0.30 g/cm <sup>3</sup> (+-0,037 g/cm <sup>3</sup> )	0.30 g/cm <sup>3</sup> (+-0,037 g/cm <sup>3</sup> )	0.30 g/cm <sup>3</sup> (+-0,037 g/cm <sup>3</sup> )

### ACOUSTIC MEASUREMENT

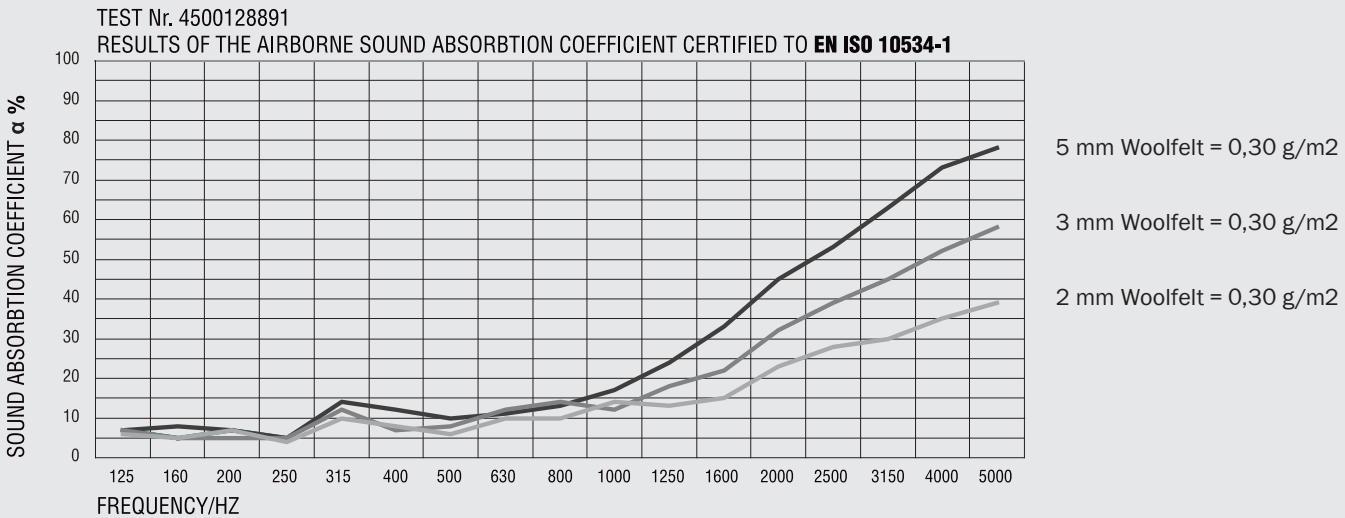

#### ABOUT FELT

Wool felt is the oldest textile known and at the same time a high-tech product. Our WOOLFELT is of the highest quality and meet exclusive demands. For you and your individual applications FELTUM creates cutom made products.

#### USES

Interiors, Wallcoverings,  
Architectural elements  
Fashion design, Home decor

#### CUSTOM MADE

Colors, shapes, installations

#### ENVIRONMENTAL

100% biodegradable  
no chemical irritants  
free of harmful substances  
Contributes to LEED®  
Renewable OEKO-TEX  
STANDARD 100 Certified  
Producto Class II

#### FIRE RESISTANT

B2 DIN 4102 T1

#### CARE INSTRUCTIONS

Vacuum occasionally  
Clean with a mild soap or  
comercial baby wipes  
Dry clean

#### FINISHING OPTIONS

Water Repellent/impregnated  
Flame-proof  
Mothproof  
Non-slip  
Antibacterial  
Fastness To Perspiration  
Fastness To Light  
Saliva-proof  
Hard Stiffened  
Anti-oxide (Asiii)

#### FELT FEATURES

homogeneous, non-reflecting  
surface  
wide colour range  
flowing drape  
clean cutting edges, no fraying